



## Scene application requirements



## Self-contained ice maker system Daily production up to 681kg

Crafted for premium commercial settings, this split-type ice maker redefines ice production with its signature crescent-shaped cubes. The innovative separated structure enhances spatial flexibility and cooling efficiency while maintaining a sleek design. It consistently delivers crystal-clear, slow-melting crescent ice that naturally hugs the glass—keeping drinks colder longer without diluting their flavor. The elegant, shimmering arc adds visual appeal to cocktails, whiskey, coffee, and tea. Easy to maintain and clean, it's an ideal choice for bars, specialty cafes, modern tea houses, and upscale events.



Output:681kg/24h Color:Stainless steel

## Features & Plus

- Automatic water intake and low water alarm
- Ice making will automatically stop when the ice is full
- 10-Second Quick-Release Tank Easy to remove and clean, keeps water fresh.
- Quiet Ice Bin Damped design for silent operation.
- One-Touch Self-Clean Automates cleaning
- Optional UV Sterilization Added protection against bacteria for safe, clean ice.

## Testing Conditions

24h icemaking test conditions:

room temperature 25 C,  
water temperature 20 C.

In case of any discrepancy, the actual product shall prevail.

## Available ice cube size

- Ice Cube Trays: 672
- 30x38x13 mm


## Key Performance Indicators

- Design Life: 150,000 cycles
- Core Components Life: 5 years
- Annual Failure Rate: ≤1.5 times (field technical support provided)
- Water Output Error: ±5%
- Ice Discharge Temperature Error: ±3℃



## Certifications available for this model



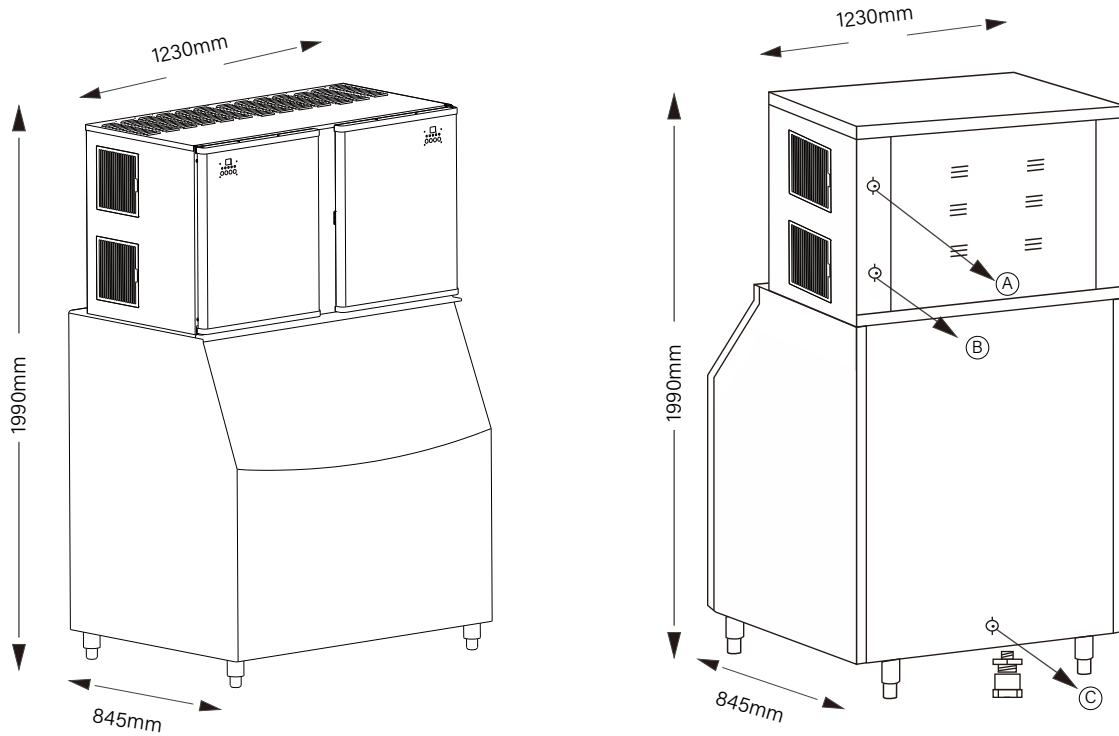

## Connections

Ⓐ Ice making water inlet Ⓑ Drain Ⓒ Power Cord Ⓓ Water Filter

## Technical information

|                         |                  |                      |                 |
|-------------------------|------------------|----------------------|-----------------|
| Machine dimension       | 1230x845x1990 mm | Machine Weigh        | 210kg           |
| Rated power/current     | 4000W            | Rated voltage        | 220V            |
| Rated frequency         | 50Hz             | Inner liner capacity | 500kg/1,102.3lb |
| 24hour per day capacity | 681kg/1500lb     | Ice grids            | 30*38*13mm      |
| Refrigerant             | R404A            | Cooled type          | Water-cooled    |

## Storage and installation

Storage temperature: 5 to 50 °C    Storage humidity: 10% to 70%    Operating ambient temperature: 5 to 40 °C    ambient humidity: 10% to 80%  
 inlet water pressure: 1-5.5Bar    Inlet water hardness: 0-8°DH    Waterproof rating: IPX3

## Implementation Standards

GB4706.1-2005/GB4706.36-2014    Production License Number: (Guangdong) XK01-302-1066

