



Scene application requirements

Hotel	
Restaurant	
Fast food	
Bar	
Disco	
Fish market	
Supermarket	
Ice cubes Sales	
Medical & Spa	
Industry	

Self-contained ice maker system Daily production up to 118kg

The product features a brand-new integrated structure with a simple and beautiful appearance. It includes an open door panel, a quick-release ice cap, and a sterilization component. The simple structure makes it easy to maintain, significantly saving cleaning time. The 10-second quick-release water tank ensures thorough cleaning, and the sterilization component further guarantees food safety. 2. Its mini size of 22*22mm provides high hardness, transparent ice crystals, and a moderate melting speed, making it suitable for a wide range of applications.



Output: 118kg/24h Color: Stainless steel

Features & Plus

- Automatic water intake and low water alarm
- Ice making will automatically stop when the ice is full
- Automatic over-temperature and over-pressure protection
- Open door panels that slide upwards, saving space
- The compressor is powerful, operates stably, and operates with low noise
- Dust-proof and water-proof design effectively reduces maintenance cycle

Key Performance Indicators

- Design Life: 150,000 cycles
- Core Components Life: 5 years
- Annual Failure Rate: ≤ 1.5 times (field technical support provided)
- Water Output Error: $\pm 5\%$
- Ice Discharge Temperature Error: $\pm 3^{\circ}\text{C}$

Testing Conditions

24h icemaking test conditions:

room temperature 25°C ,
water temperature 20°C .

In case of any discrepancy, the actual product shall prevail.



Available ice cube size

- $22 \times 22 \times 22$ mm (6*18)
- $29 \times 29 \times 22$ mm (4*14)
- $28 \times 33 \times 22$ mm (4*12)
- $22 \times 13 \times 22$ mm (6*29)



Certifications available for this model



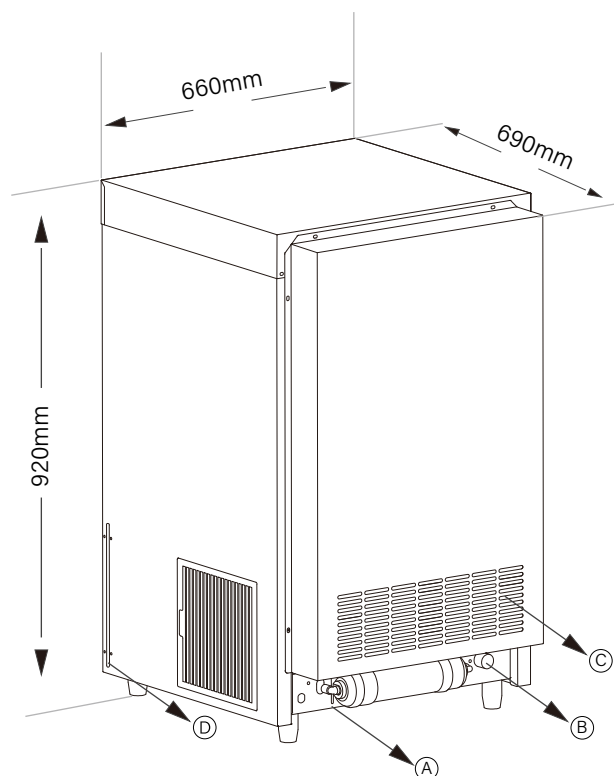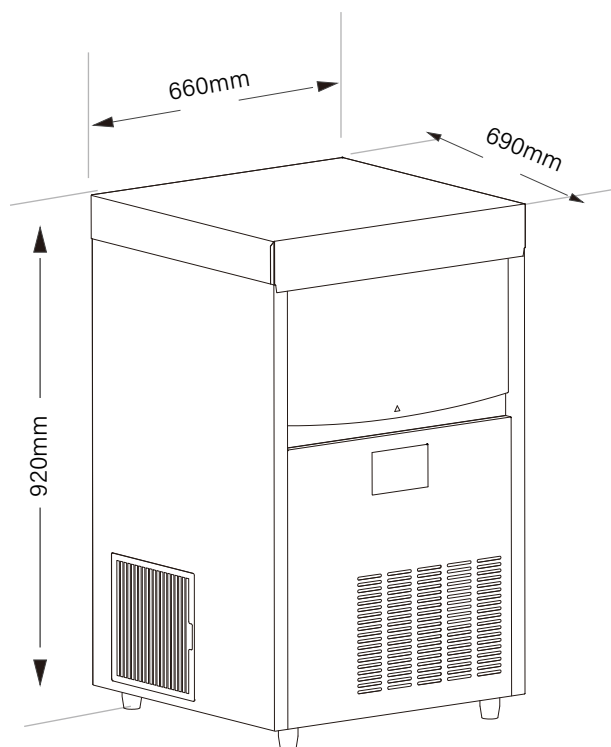

Connections

(A) Drain (black) (B) Ice making water inlet (white interface) (C) Cooling port (D) Dust-proof net

Technical information

Machine dimension	660x690x920 mm
Rated power/current	950W
Rated frequency	50Hz
24hour per day capacity	118kg/260lb
Refrigerant	R290

Machine Weigh	72kg
Rated voltage	220V
Inner liner capacity	45kg/99.21lb
Ice grids	22*22*22mm
Cooled type	Air-cooled

Storage and installation

Storage temperature: 5 to 50 °C Storage humidity: 10% to 70% Operating ambient temperature: 5 to 40 °C ambient humidity: 10% to 80%
inlet water pressure: 1-5.5Bar Inlet water hardness: 0-8°DH Waterproof rating: IPX3

Implementation Standards

GB4706.12005 GB4706.36204 GB4706.34208 Production License Number: (Guangdong) XK01-302-1066

